

UNI cabinets



QUALITY STANDARD

- LST EN 14073-1:2004
- LST EN 14073-2:2004
- LST EN 14073-3:2004
- LST EN 14074-2004

TECHNICAL INFORMATION

Carcass

- 18 mm MFC (melamine) with 1 mm ABS edging.

Top and bottom

- 25 mm MFC (melamine) with 2 mm ABS edging.

Back

- Made of 16 mm MFC (melamine);
- Fabric back panel (X0Z071, X0Z103): HDF 3 mm coated with foam 3 mm and fabric;
- Whiteboard back panel (X0Z070, X0Z102): HPL 1 mm.

Shelves

- 18 mm MFC (melamine) with 1 mm ABS edging, load capacity – 25 kg;
- 25 mm MFC (melamine) with 2 mm ABS edging (for W=1000 mm wide carcass), load capacity – 32 kg;
- Fixed or height adjustable shelves.

Doors

- Doors with hinges in 18 mm MFC (melamine) with 1 mm ABS edging;
- Sliding doors in 18 mm MFC (melamine) with 1 mm ABS edging (with plastic runners);
- Tambour doors from ABS profile;
- 5 mm tempered clear glass.

Handles (2 types)

- 136 mm length square handle, powder coated metal;
- 150 mm length curved handle, powder coated metal.



Handle type (colour + handle code)

Drawers

- File drawers for both A4 and foolscap files;
- Full extension, central locking with anti-tilt function;
- Made of welded metal sheet, without bottom. Powder coated black metal;
- Ball bearing slide, load capacity – 50 kg.

Fittings

- Cams with connecting bolts;
- Lock with metal bars;
- Fast assembling hinges (does not require any tools to connect hinges and plates).

Plinth

- Made of 18 mm MFC (melamine), H=80 mm.

Metal legs

- Metal tube – 40x40 mm;
- Plastic feet with height levelling, H=80 mm +10 mm;
- Powder coated metal.

Plastic legs

- Black plastic height levelling feet, H=23 mm +10 mm.


Castors

- Four twin wheel castors, Ø80 mm;
- Two out of four with stopper brakes;
- The load capacity: 100 kg per castor.

GUARANTEE

- 5 years

RANGE

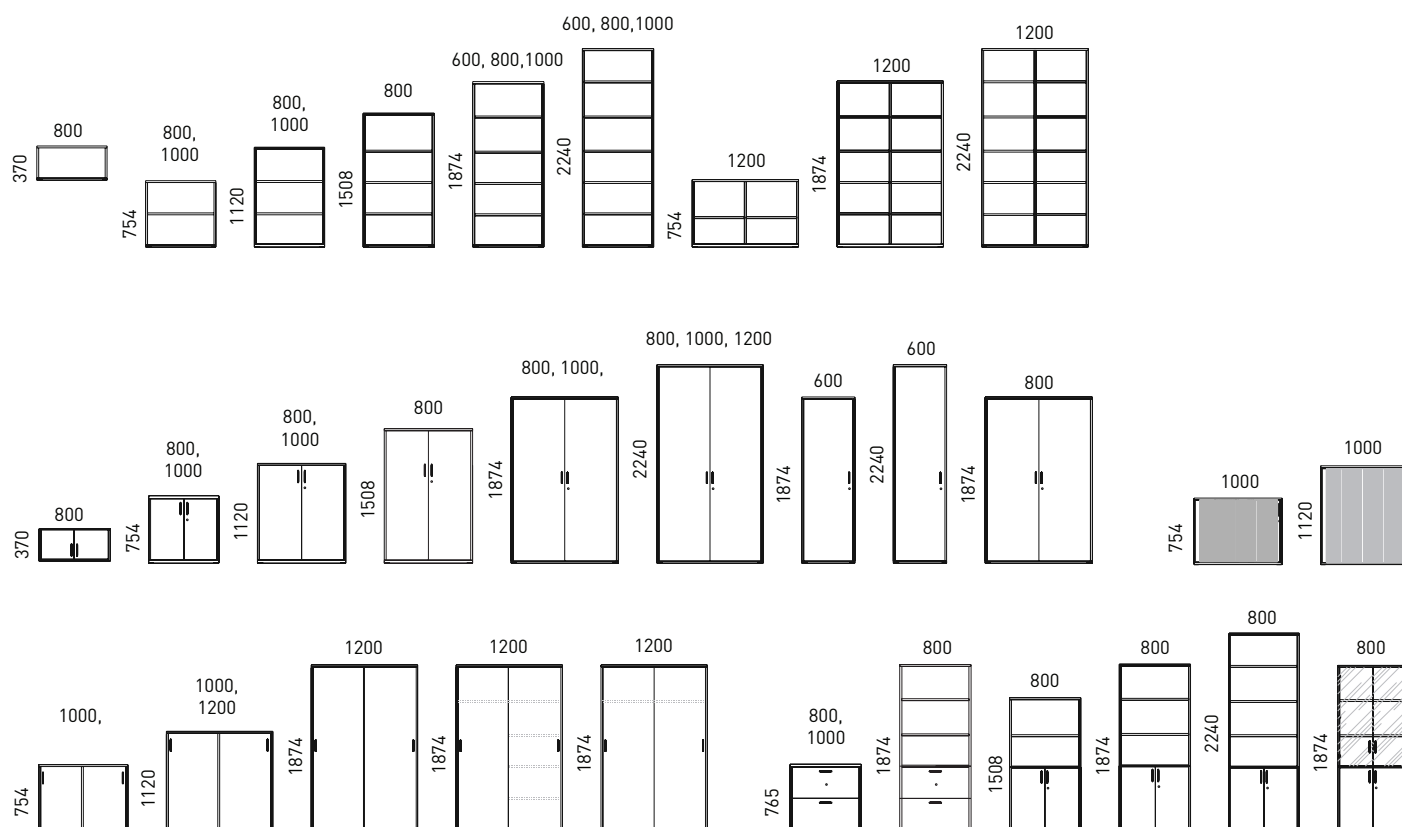

Must be ordered (one of the following)



Plinth, metal legs, plastic legs or castors


Optional



Fabric back panel for specified cabinets



Whiteboard for specified cabinets



Counterweights for specified cabinets with metal or plastic legs

UNI Plus cabinets



QUALITY STANDARD

- LST EN 14073-1:2004
- LST EN 14073-2:2004
- LST EN 14073-3:2004
- LST EN 14074-2004

TECHNICAL INFORMATION

Carcass

- 18 mm MFC (melamine) with 1 mm ABS edging.

Top and bottom

- 25 mm MFC (melamine) with 2 mm ABS edging.

Back

- Made of 16 mm MFC (melamine);
- Fabric back panel (X0Z071 and X0Z103): HDF 3 mm coated with foam 3 mm and fabric;
- Whiteboard back panel (X0Z070 and X0Z102): HPL 1 mm.

Shelves

- 18 mm MFC (melamine) with 1 mm ABS edging, load capacity – 25 kg;
- 25 mm MFC (melamine) with 2 mm ABS edging (for W=1000 mm wide carcass), load capacity – 32 kg;
- Fixed or height adjustable shelves.

Shelf options

- Lateral filing shelf and cradle (suitable for A4 or foolscap filing) from metal sheet;
- Shelf with 5 chromed dividers from metal 5 mm.

Pull-out filing cradle

- File drawers for both A4 and foolscap files;
- Full extension, with anti-tilt function;
- Made from welded metal sheet, without bottom. Powder coated (black);
- Ball bearing slide, load capacity 50 kg.

Doors

- With hinges in 18 mm MFC (melamine) with 1 mm ABS edging;
- Tambour doors from ABS profile.

Handles (2 types)

- 136 mm length square handle, powder coated metal;
- 150 mm length curved handle, powder coated metal.



Handle type (colour + handle code)

Fittings

- Cams with connecting bolts;
- Lock with metal bars;
- Fast assembling hinges (does not require any tools to connect hinges and plates).

Plinth

- Made of 18 mm MFC (melamine), H=80 mm.

Metal legs

- Metal tube - 40x40 mm;
- Plastic feet with height levelling, H=80 mm +10 mm;
- Powder coated metal.

Plastic legs

- Black plastic height levelling feet, H=23 mm +10 mm (with OPTIMA desks (H=720 mm));
- Black plastic height levelling feet, H=38 mm +10 mm (with NOVA desks (H=740 mm)).


Castors



- Four twin wheel castors, Ø80 mm;
- Two out of four with stopper brakes;
- The load capacity: 100 kg per castor.

GUARANTEE

- 5 years

RANGE

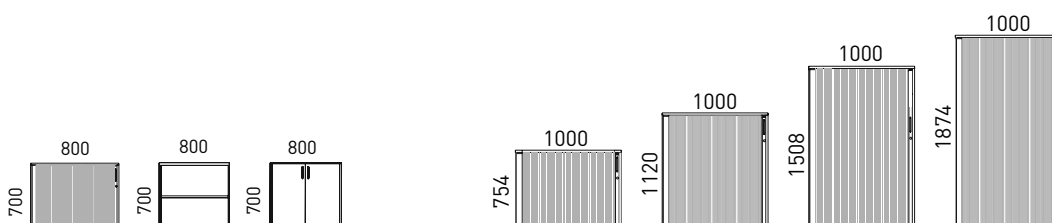

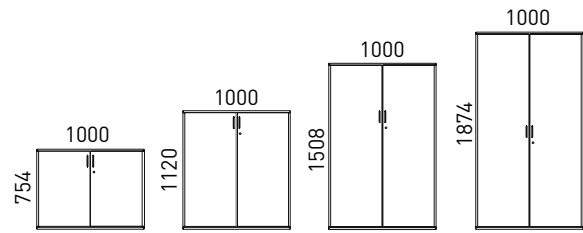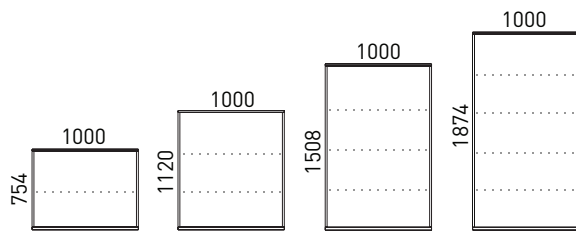


Cabinet with tam-bour doors (with lock)



Bookcase



Cabinet with lock

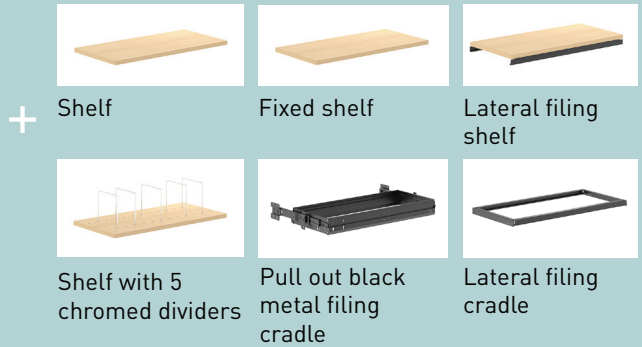

Desk cabinets



Cabinet with tam-bour doors (with lock)



Bookcase



Cabinet with lock




Must be ordered

(one of the following)



Plinth, metal legs, plastic legs or castors

Optional



Fabric back panel

Whiteboard panel

UNI Slide cabinets



QUALITY STANDARD

- LST EN 14073-1:2004
- LST EN 14073-2:2004
- LST EN 14073-3:2004

TECHNICAL INFORMATION

Carcass and shelves

- Made of 18 mm MFC (melamine) with 1 mm ABS edging;
- Height adjustable shelves;
- Shelves load capacity – 25 kg.

Doors

- Made of 18 mm MFC (melamine) with 1 mm ABS edging.

Handles

- Metal profile 60 mm, length matches the door height;
- Powder coated metal.



EY



MY



T1Y



AY

Handle type (colour + handle code)

Plinth

- Made of 18 mm MFC (melamine);
- Plastic feet with height levelling (+10 mm).

Metal legs

- Metal tube - 40x40 mm;
- Plastic feet with height levelling (+10 mm);
- Powder coated metal.

Plastic legs

- Plastic height levelling feet;
- H=23 mm +10 mm;
- Black colour.


Castors

- Four twin wheel castors, Ø80 mm;
- Two out of four with stopper brakes;
- The load capacity: 100 kg per castor.

GUARANTEE

- 5 years

RANGE

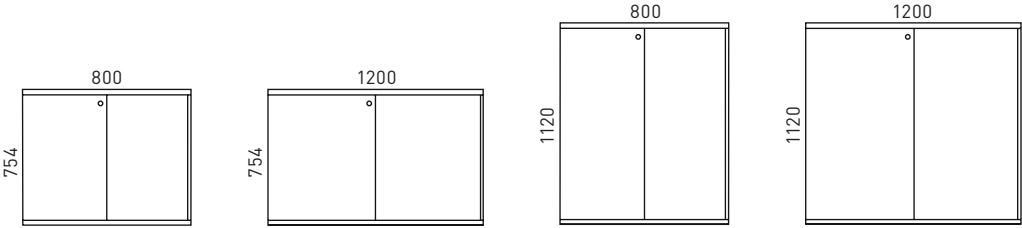

Must be ordered

(one of the following)



Plinth



Metal legs



Plastic legs



Castors